


MC




キャップ雌

VC




キャップ雄

MMS




直管雌雌

VVS




直管雄雄

B90



ベンド90°

B60



ベンド60°

B45




ベンド45°

B30





ベンド30°

着脱はワンタッチ

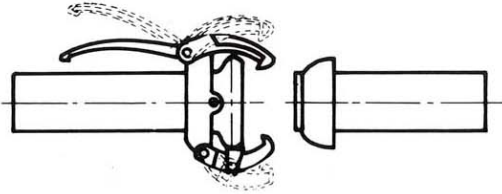

あらゆる方向に15°の芯振れ可能



●材質：
天然ゴム、クロロプレンゴム、
ニトリルゴム、シリコンゴム、
弗素ゴム



単位：mm


	Dφ	T
2" 50	85.2	11
2½" 70	110	11.5
3" 89	139.2	13.8
4" 108	158.5	17.8
5" 133	189	22
6" 159	223	21.5
8" 216	305	24

ゴムキャップ




サイズ：2インチ、4インチ


仮設配管

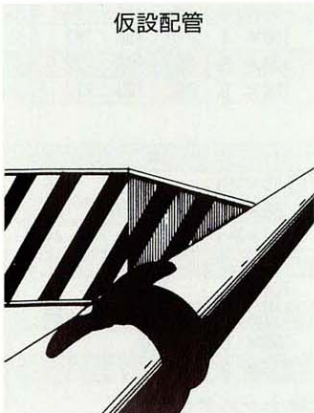

タンクローリー車

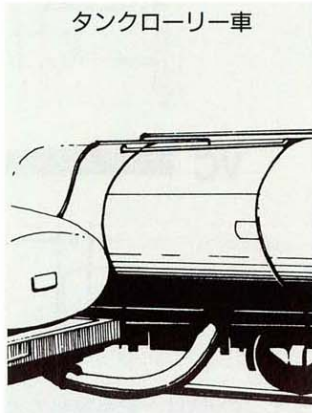

排水ポンプ

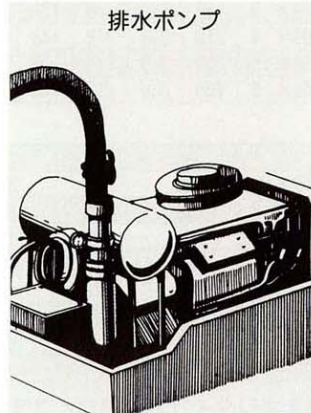

船舶給油

